

FIG. 1

FIG. 2



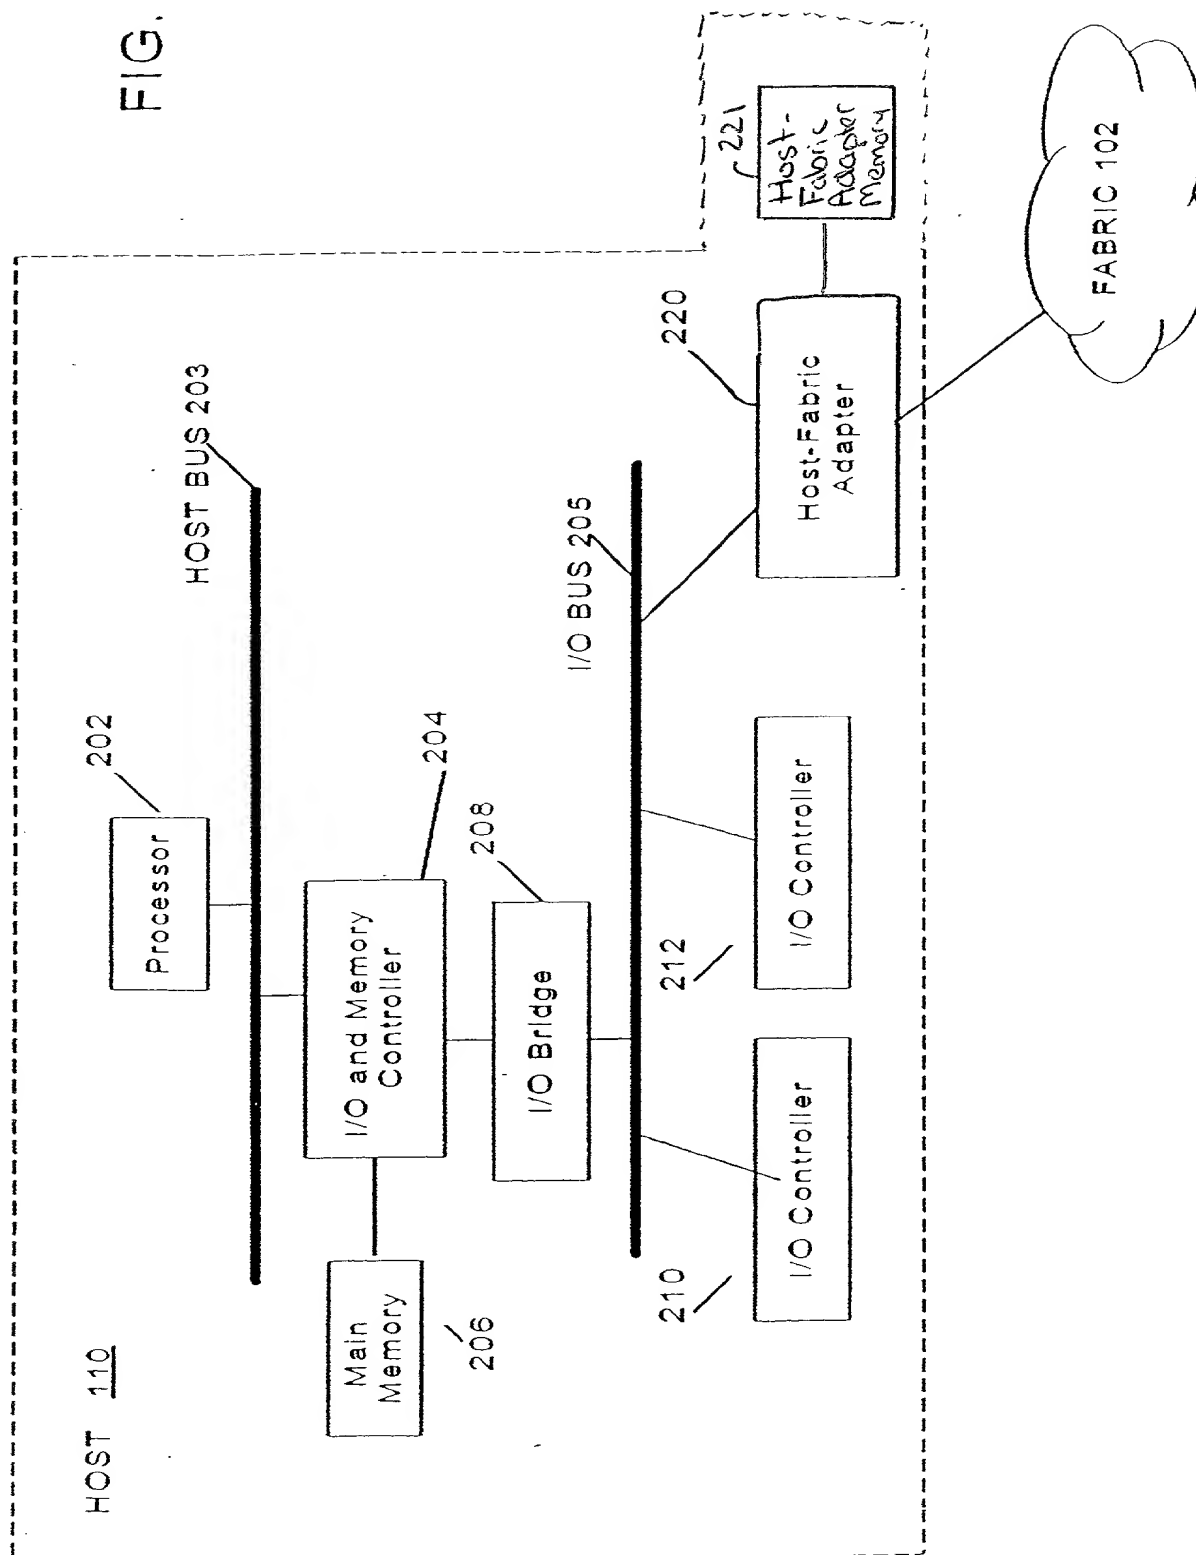


FIG. 3

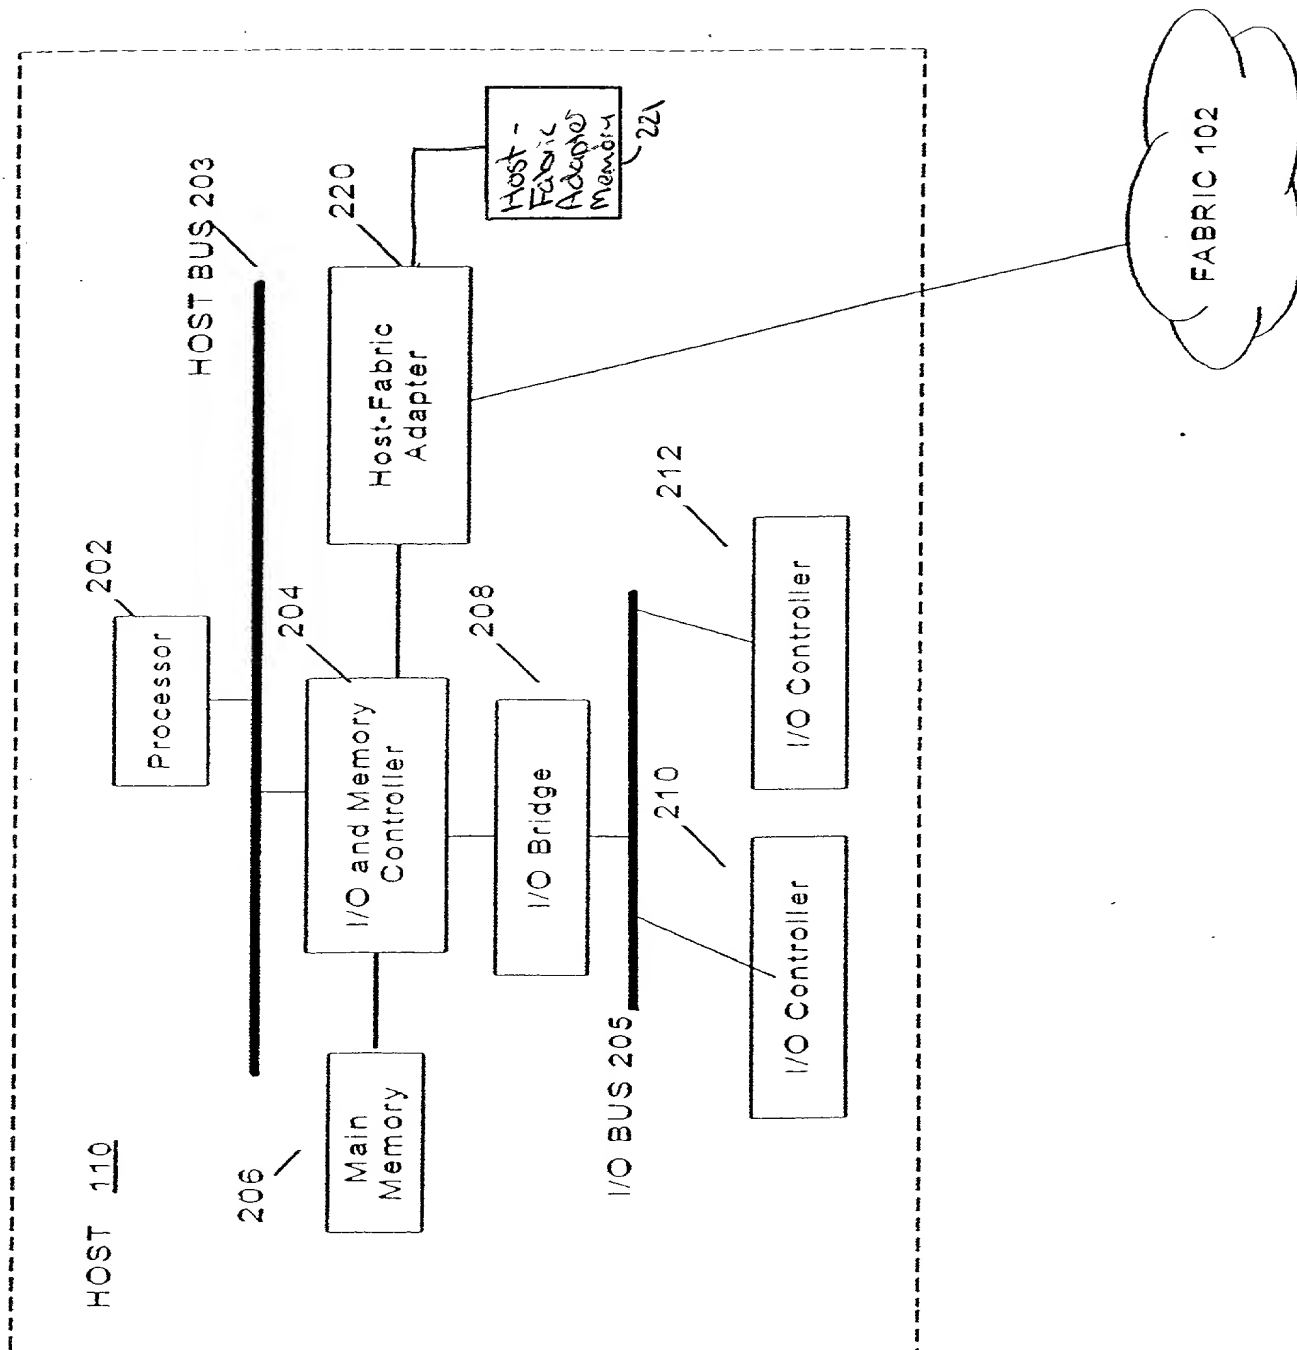

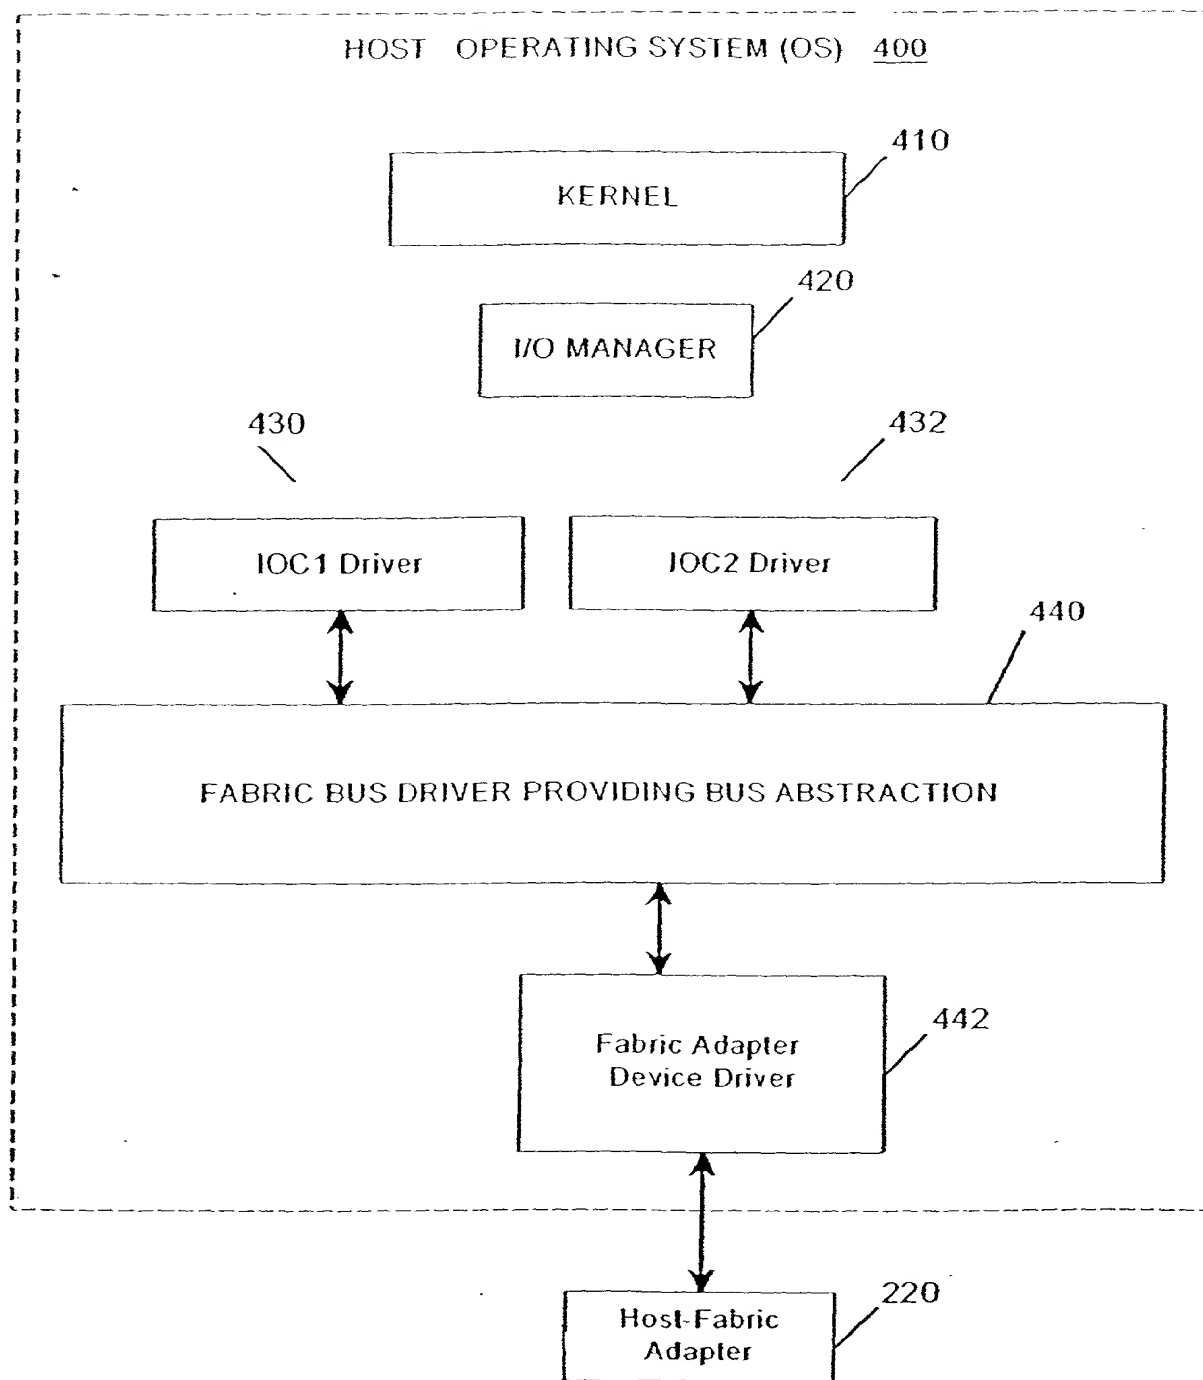

EXAMPLE SOFTWARE DRIVER STACKS FOR HOST HAVING
FABRIC-ATTACHED I/O

FIG. 4

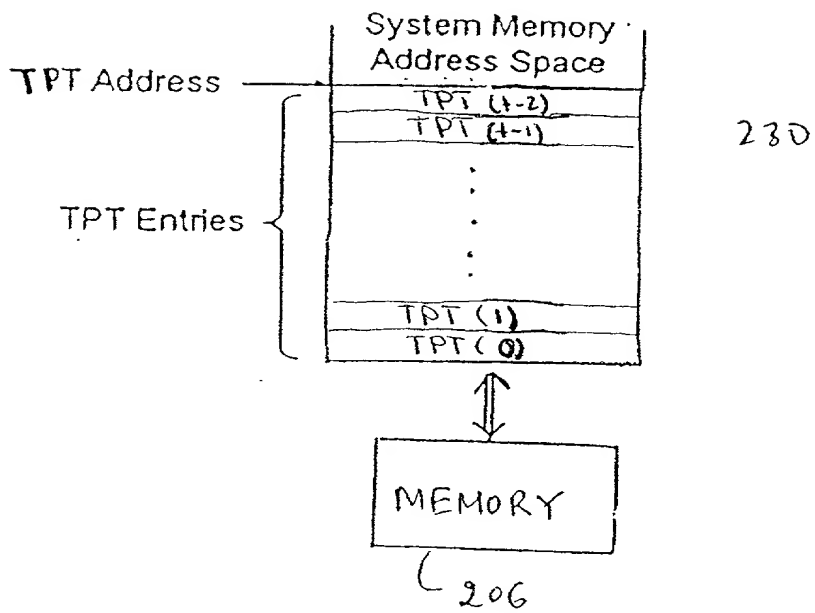


FIG. 5

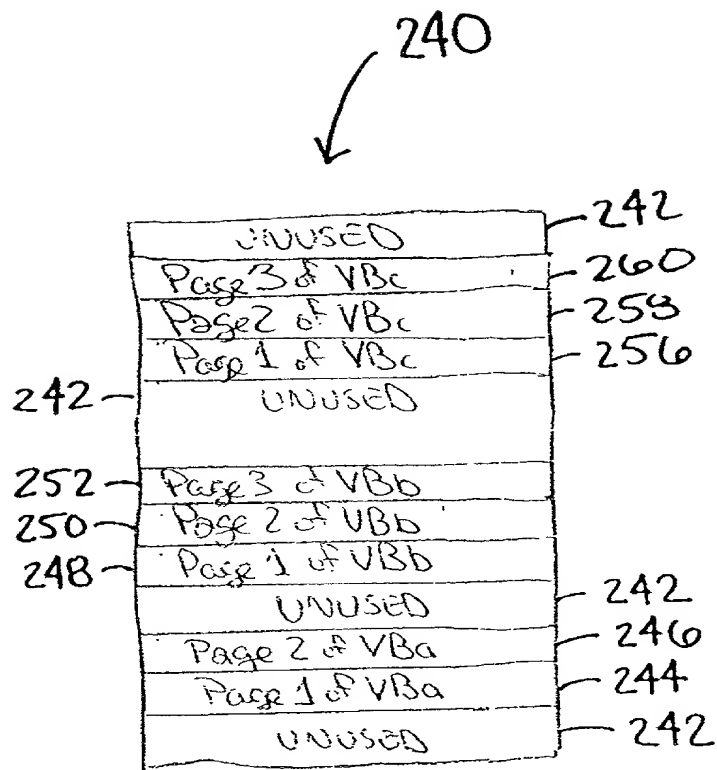


FIG. 6


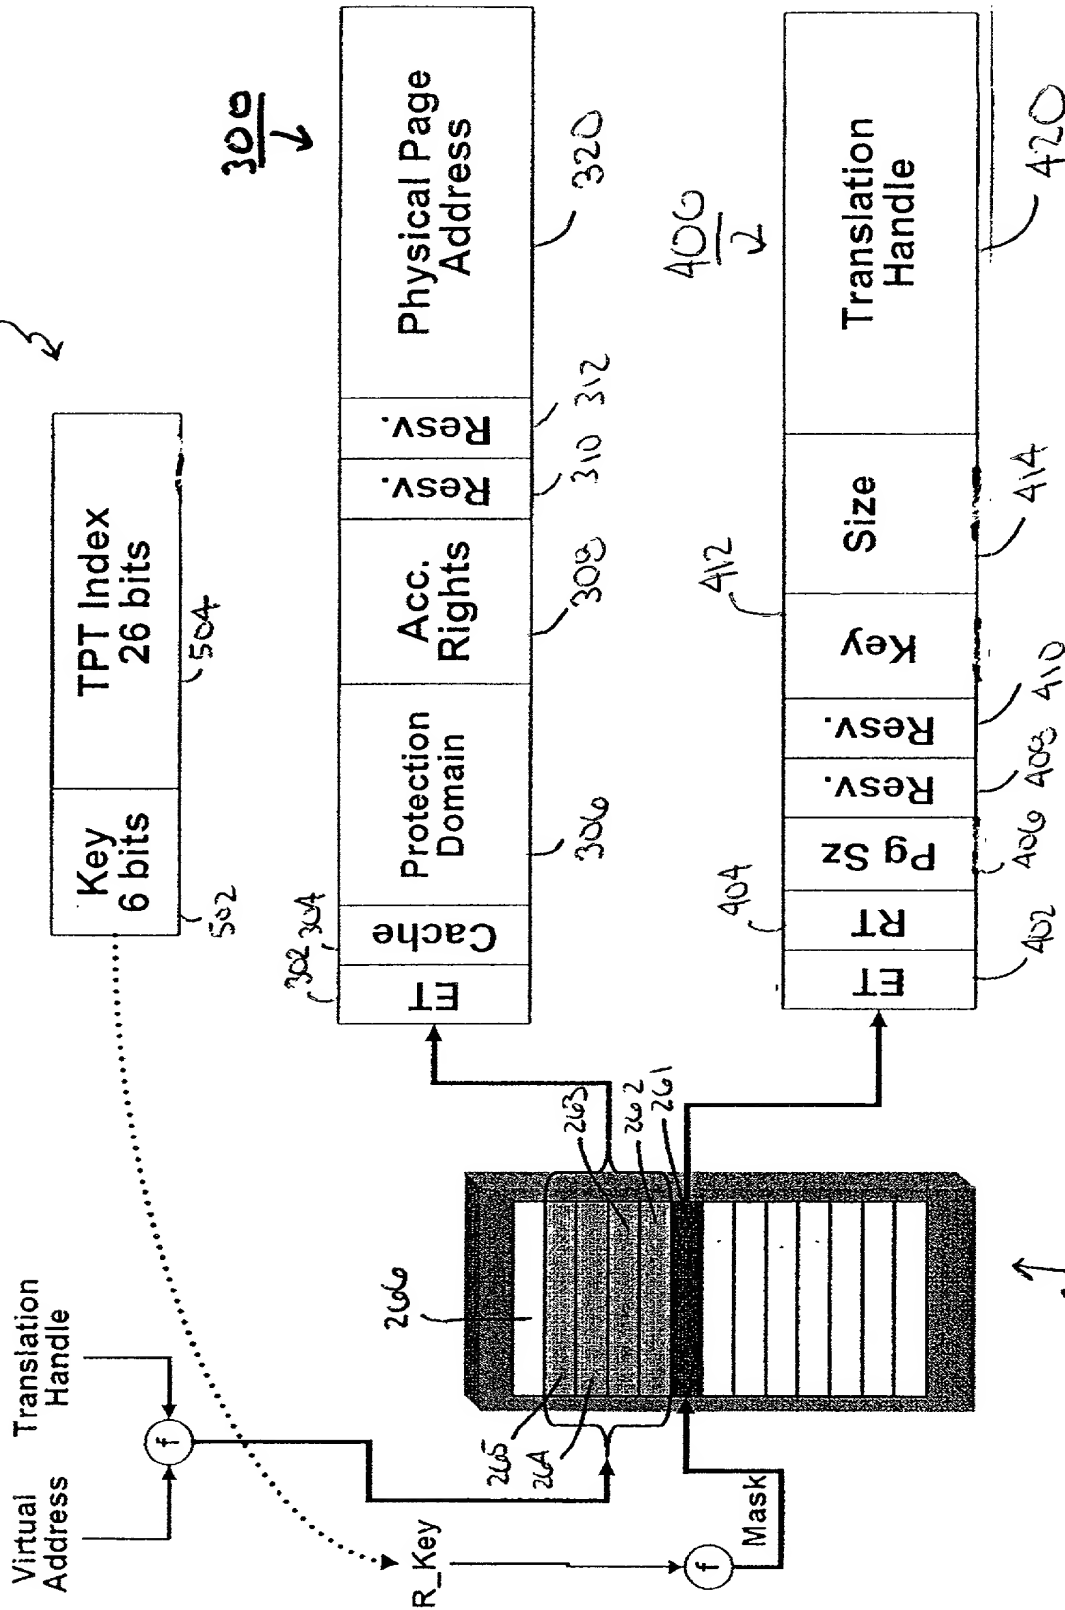


FIG. 7

500

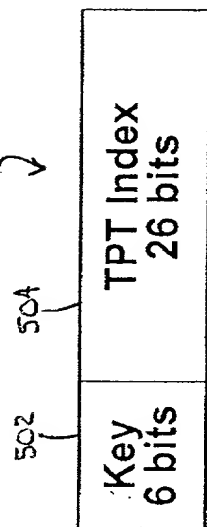


Virtual Translation Handle


f



R_Key

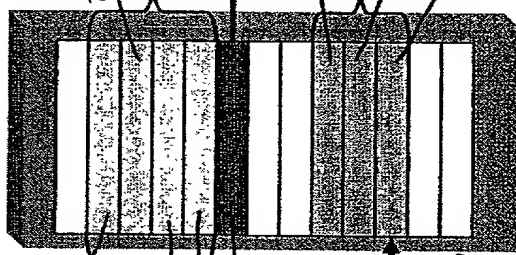

300



Bindable Region Entry 8 bytes (64 bits)

400



640

Base Address (63:32)

630

Base Address (31:0)

Key

610

ET RT R. Acc. Rights Bound Pg Sz Key PD

FIG. 8

270